



Superior Clamping and Gripping



## Product Information

Universal gripper PGN-plus-P 100

## Reliable. Robust. Flexible.

### Universal gripper PGN-plus-P

Universal electric 2-finger parallel gripper with permanent lubrication, high gripping force, and high maximum moments due to the use of a multi-tooth guidance.

#### Field of application

Pneumatic universal gripper for handling of workpieces in universal applications. For universal use in clean to slightly dirty environments. Special versions available for dirty environments.

#### Advantages – Your benefits

**Robust multi-tooth guidance** for precise handling

**High maximum moments possible** suitable for using long gripper fingers

**Lubricant pockets in the multi-tooth guidance** ensure process reliability and extended maintenance intervals

**Maximum piston surface area** for maximum gripping forces

**Mounting from two sides in three screw directions** for universal and flexible gripper assembly

**Air supply via hose-free direct connection or screw connections** for universal and flexible gripper assembly

**Comprehensive sensor accessory program** for versatile querying possibilities and stroke position monitoring

**Manifold options** for special optimization for your specific case of application (dustproof, high-temperature, corrosion-protected, etc.)



Sizes  
Quantity: 11



Weight  
0.08 .. 39.8 kg



Gripping force  
180 .. 26100 N




Stroke per jaw  
2 .. 45 mm



Workpiece weight  
0.9 .. 97.5 kg

## Functional description

The piston is moved up and down by compressed air.  
The angled active surfaces of the wedge-hook produce a synchronized, parallel jaw motion.

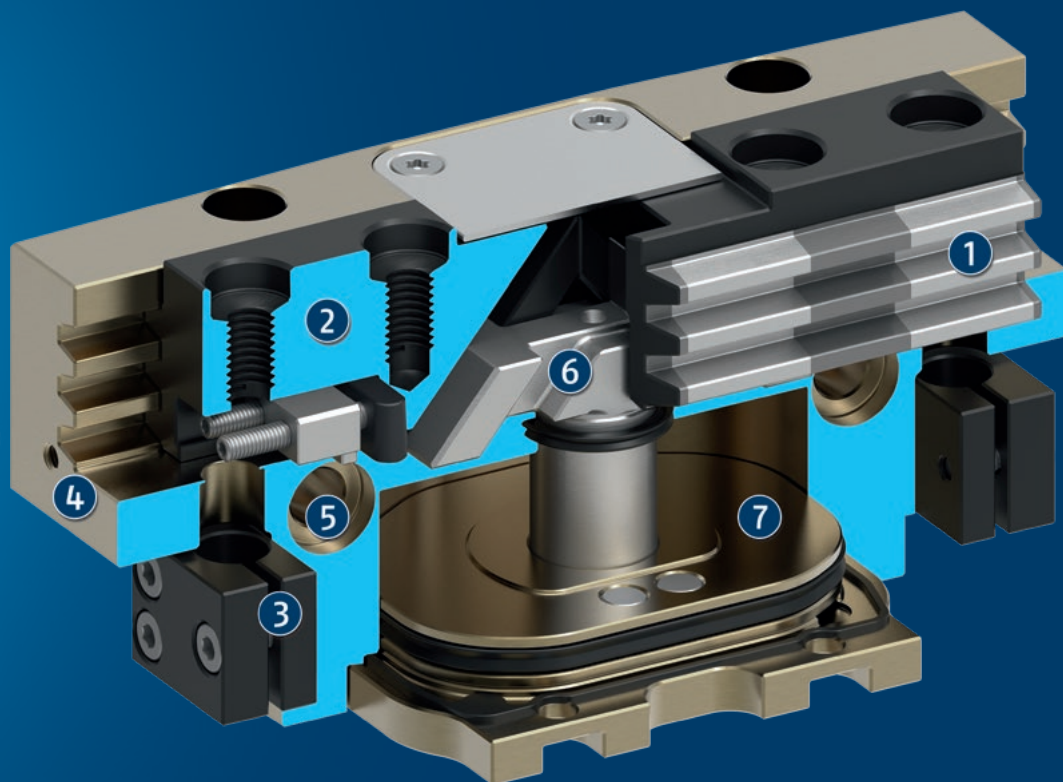

### ① Multi-tooth guidance

Maximum service life due to lubricant pockets in the robust multi-tooth guidance, and absorption of high forces and torques by means of the large guidance support

### ② Base Jaw

with standardized screw connection diagram for the connection of the workpiece-specific gripper fingers

### ③ Bracket for sensors

Brackets for proximity switches and adjustable control cams in the housing

### ④ Housing

is weight-optimized due to the use of high-strength aluminum alloy

### ⑤ Centering and mounting possibilities

for universal assembly of the gripper

### ⑥ Wedge-hook design

for high power transmission and minimal wear as a result of larger diagonal pull surfaces

### ⑦ Piston

Maximum force through maximum surface of drive piston

## Detailed functional description


### Dustproof version SD



The "dustproof" option increases the degree of protection against penetrating substances.

This can either be ordered in a ready-mounted gripper version or else retrofitted to the gripper using the "SAD PGN-plus-P" retrofit kit.


### Gripping force maintenance version AS/IS

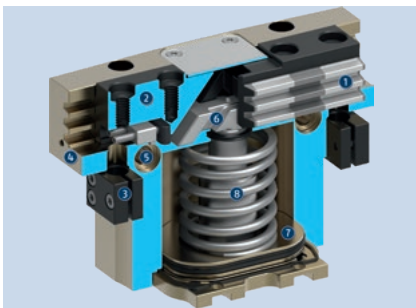

The mechanical gripping force maintenance device ensures that a minimum clamping force will be applied even if there is a drop in pressure. In the AS version this acts as a closing force, and in the IS version as an opening force. The image shows the AS version. The gripping force maintenance can also be used to increase the gripping force or for one-way gripping.

- ❶ Multi-tooth guidance
- ❷ Base Jaw
- ❸ Bracket for sensors
- ❹ Housing
- ❺ Centering and mounting possibilities
- ❻ Wedge-hook design
- ❼ Piston
- ❽ Gripping force maintenance device

### Settings of the control cams during monitoring with inductive proximity switches

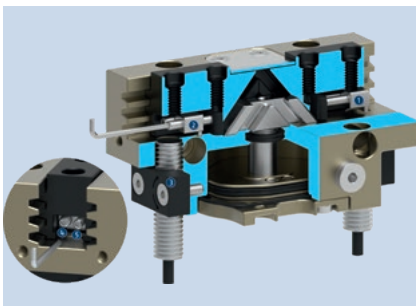


Monitoring with inductive proximity switch can be performed as standard from size 64. In delivery state, the positions "gripper open" and "gripper closed" are preset with the control cams. The inductive sensors must be ordered separately and are slid into the housing up to the stop and clamped.

In order to monitor any other position, such as "workpiece gripped" for example, both control cams can be individually set in the respective base jaws.

- ❶ Control cam preset for "gripper closed" position
- ❷ Control cam preset for "gripper open" position
- ❸ Holder with clamping screw for fixing the sensor
- ❹ Clamping screw for process-reliable fixing of the adjusted switching point
- ❺ Adjusting screw for setting any switching point

### Optional mounting possibility under the cover sheet for customer-specific additional structure

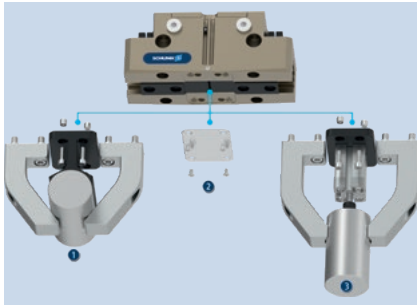

In delivery state, a cover sheet is mounted to the gripper. This can be removed if necessary. Under the cover sheet are threads and fittings for mounting customer-specific designs for implementing additional functions.

- ❶ Additional centering or support of the workpiece
- ❷ The cover plate (can be removed)
- ❸ Ejector with external cylinder attached to the gripper

## General notes about the series

**Operating principle:** Wedge gear with surface power transmission

**Housing material:** Aluminum

**Base jaw material:** Steel

**Actuation:** pneumatic, with filtered compressed air as per ISO 8573-1:2010 [7:4:4].

**Warranty:** 36 months

**Longlife:** 30 years functional warranty (details can be found online)

**Scope of delivery:** Brackets for proximity switches, centering sleeves, O-rings for direct connection, assembly instructions (operating manual with declaration of incorporation is available online)

**Gripping force maintenance device:** possible by using the version with mechanical gripping force maintenance or pressure maintenance valve SDV-P

**Gripping force:** is the arithmetic sum of the individual force applied to each jaw at distance P (see illustration).


**Finger length:** is measured from the reference surface as the distance P in direction to the main axis.

The maximum permissible finger length applies until the nominal operating pressure is achieved. With higher pressures, the finger length must be reduced proportionally to the nominal operating pressure.

**Repeat accuracy:** is defined as a distribution of the end Position for 100 consecutive strokes.

**Workpiece weight:** is calculated for force-fit gripping with a coefficient of static friction of 0.1 and a safety factor of 2 against workpiece slippage at acceleration due to gravity g. For form-fit or capture gripping, there are significantly higher permissible workpiece weights.

**Closing and opening times:** are purely the times that the base jaws or fingers are in motion. Valve switching times, hose fill times, or PLC reaction times are not included, and are to be considered when cycle times are calculated.

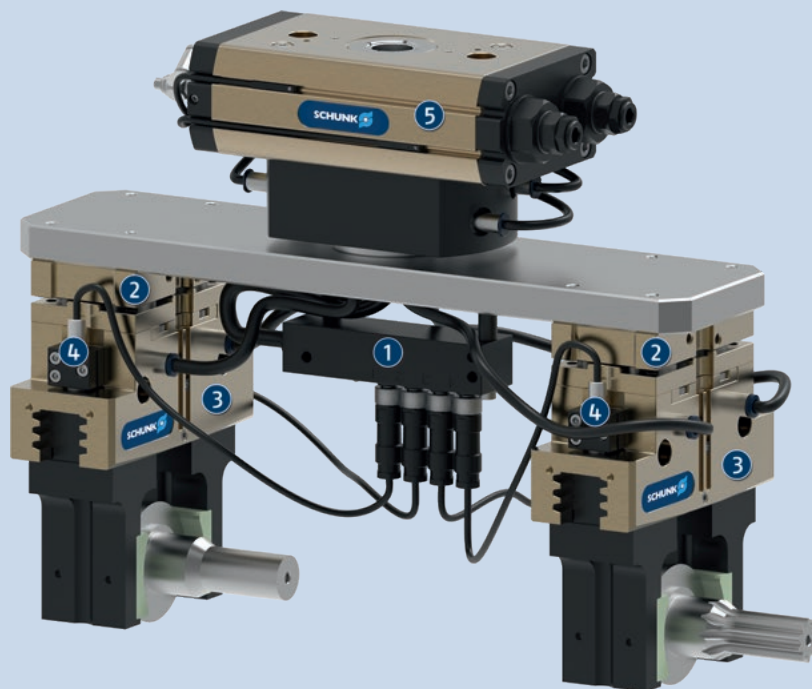

## Application example

Handling tool for loading and unloading raw and finished parts and compensation of inaccurate position. A sensor distributor is used for routing signals through a cable.

① Sensor distributor V4

② Tolerance compensation unit TCU-Z

③ Universal gripper PGN-plus-P

④ IN sensors

⑤ Universal rotary actuator SRM

## SCHUNK offers more ...

The following components make the product PGN-plus-P even more productive – the suitable addition for the highest functionality, flexibility, reliability, and controlled production.



Rotary unit



Quick change system



Compensation unit



Linear module



Jaw quick-change system



Finger blank



Pressure maintenance valve



Universal intermediate jaw



Flexible position sensor



Analog position sensor



Magnetic switches



Inductive proximity switches

① For more information on these products can be found on the following product pages or at [schunk.com](http://schunk.com). Please contact us: SCHUNK technical hotline +49-7133-103-2696

## Options and special information

**Gripping force maintenance version AS/IS:** The mechanical gripping force maintenance version ensures minimum gripping force even in the event of a pressure drop. In the AS/IS version this acts as a closing force, in the IS version as an opening force.

**High-temperature version V/H/T:** for use in hot environments

**Precision version P:** for the highest accuracy

**Anti-corrosion version K:** for use in corrosion-inducing atmospheres

**ATEX version EX:** for explosive environments


**Dustproof version SD:** absolutely dustproof, increased degree of protection against ingress of materials.

**Additional versions:** Various options can be combined with each other.

**Integrated air purge connection:** impedes the ingress of dirt into the inside of the gripper

## SCHUNK gripper PGN-plus-P

### Overview Accessories

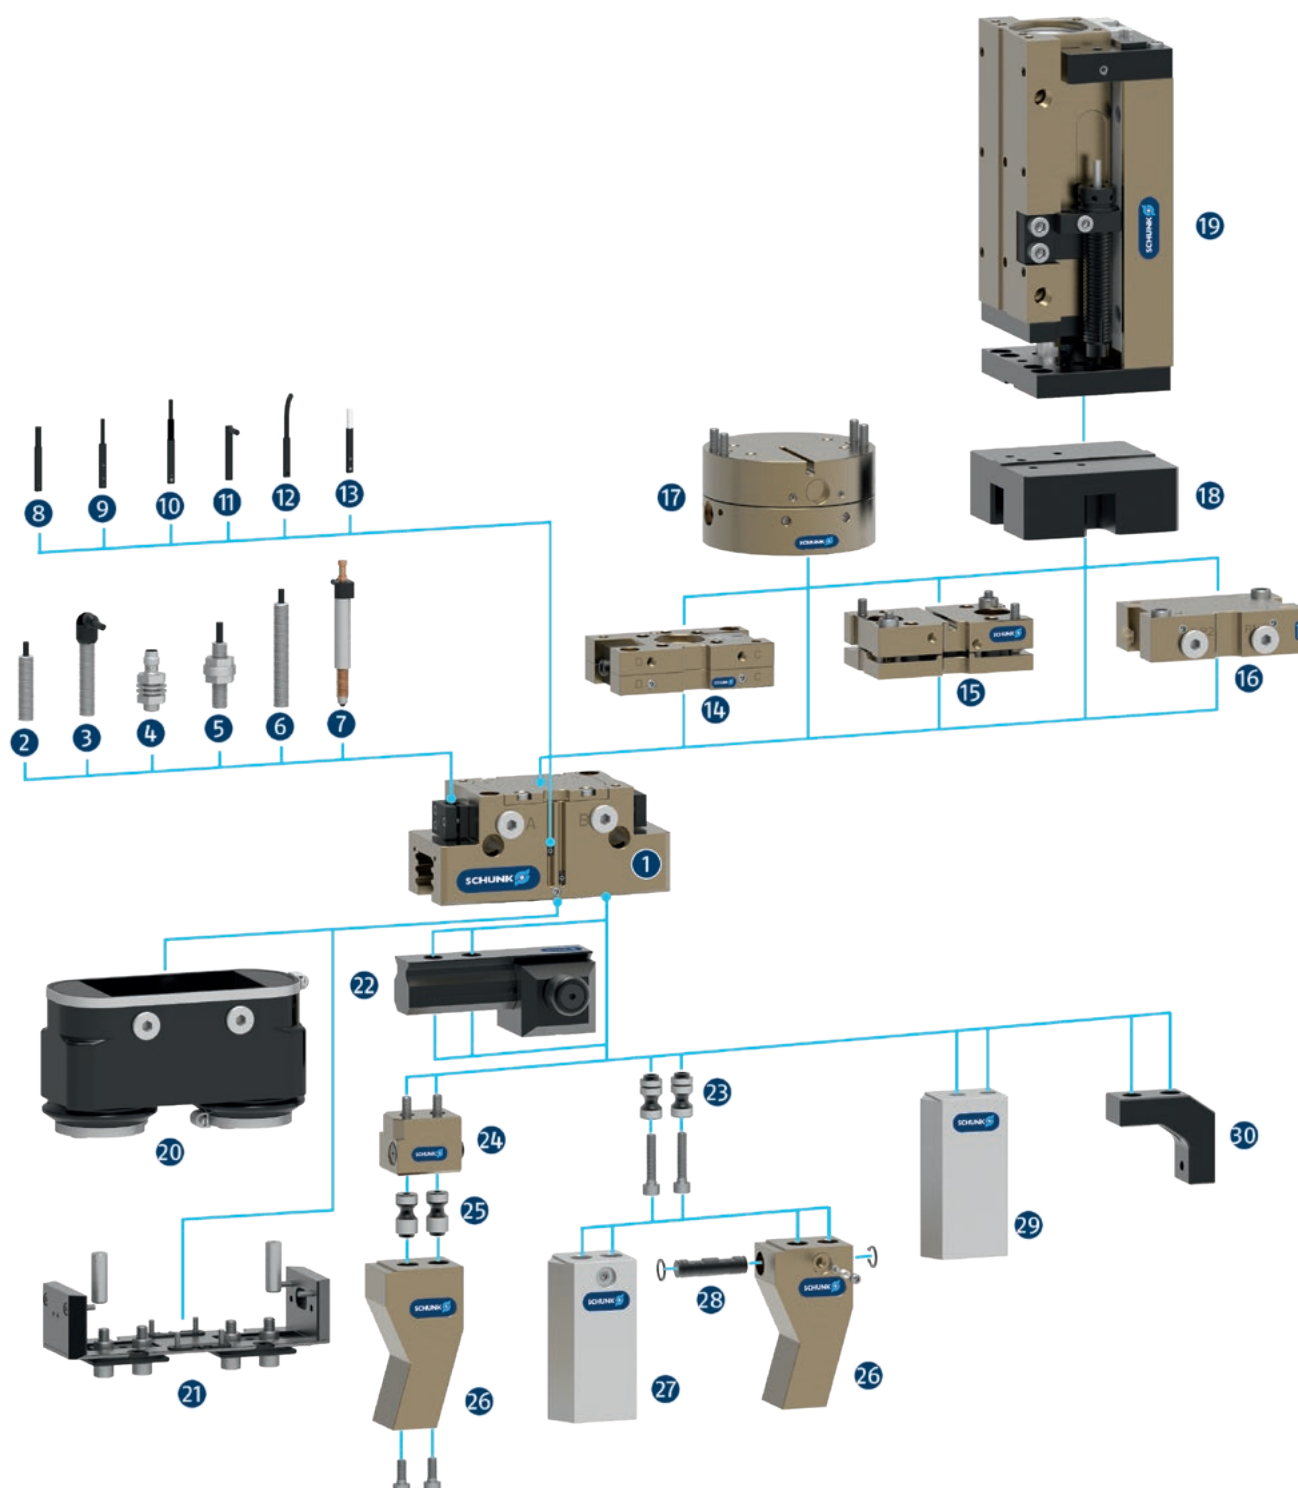

## 1 PGN-plus-P

Universal 2-finger parallel gripper with a high gripping force and high maximum moments due to the use of a multi-tooth guidance

## Sensor system

### 2 IN ...

Inductive proximity switch with molded cable and straight cable outlet

### 3 IN ...-SA

Inductive proximity switch with molded cable and lateral cable outlet

### 4 IN-C 80

Inductive proximity switch, directly pluggable

### 5 FPS

Flexible position sensor for monitoring up to five different, freely selectable positions

### 6 APS-Z80

Inductive position sensor for precise position detection of the gripper jaws with analog output

### 7 APS-M15

Mechanical measuring system for precise position detection of the gripper jaw with analog output

### 8 MMS 22

Magnetic switch with straight cable outlet for monitoring a position

#### MMS 22-PI1

Magnetic switch with straight cable outlet for monitoring a freely programmable position

### 9 MMS 22-PI2

Magnetic switch with straight cable outlet for monitoring two freely programmable positions

### 10 MMS 22-PI1-HD

MMS 22-PI1 in robust design

#### MMS 22-PI2-HD

MMS 22-PI2 in robust design

### 11 MMS 22-SA

Magnetic switch with lateral cable outlet for monitoring a position

#### MMS 22-PI1-SA

Magnetic switch with side cable outlet for monitoring a freely programmable position

### 12 MMS-P

Magnetic switch with straight cable outlet for monitoring two freely programmable positions

### 13 MMS-A

Analog magnetic switch with straight cable outlet for measuring the gripper jaw position with analog output and teach function

## Complementary products

### 14 CWS

Manual change system with integrated air feed-through for simple exchange of the handling components

### 15 TCU

Tolerance compensation unit for compensating small tolerances in the plane

### 16 SDV-P-E-P

Pressure maintenance valve for temporary force and position maintenance

### 17 AGE

Compensation unit for compensation of large tolerances along the X and Y axes

### 18 ASG

Adapter plate for combining various automation components in the modular system

### 19 CLM

Linear module with pneumatic drive and scope-free pre-loaded junction rollers

### 20 HUE

Sleeve for protection against dirt

### 21 SAD

Dustproof version, retrofit kit

## Fingerzubehör

### 22 UZB

The universal intermediate jaw allows fast tool-free and reliable plugging and shifting of top jaws at the gripper.

### 23 BSWS-AR

Adapter coupling of jaw quick-change system for fast, manual change of top jaws

### 24 BSWS-B

Locking mechanism of the jaw quick-change system for fast, manual exchange of top jaws

### 25 BSWS-A

Adapter coupling of the jaw quick-change system for adaptation to the customized finger

### 26 Customized fingers

### 27 BSWS-ABR

Finger blank made of aluminum with interface to the jaw quick-change system

#### BSWS-SBR

Finger blank made of steel with interface to the jaw quick-change system

### 28 BSWS-UR

Locking mechanism for the integration of the jaw quick-change system into customized fingers

### 29 ABR/SBR

Finger blanks made of steel or aluminum with standardized screw connection diagram

### 30 ZBA


Intermediate jaws for reorientation of the mounting surface

# PGN-plus-P 100


Universal gripper




## Gripping force O.D. gripping

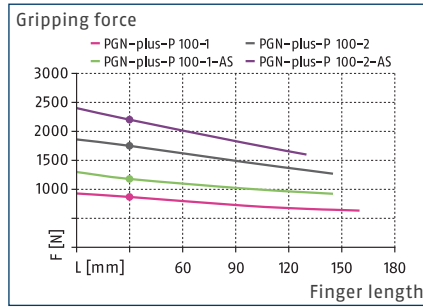

## Gripping force I.D. gripping

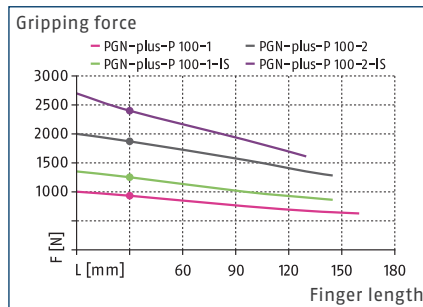

## Dimensions and maximum loads

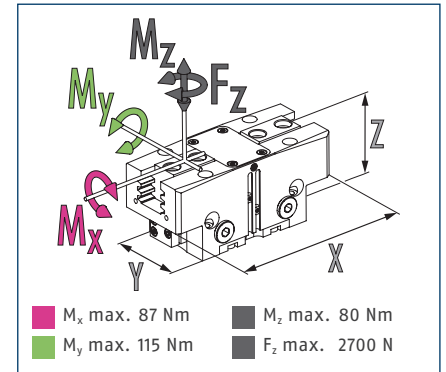


① The indicated moments and forces are static values, apply for each base jaw and should not appear simultaneously. Loads may additionally occur to the moment produced by the gripping force itself.

## Technical data

Characterization		PGN-plus-P 100-1	PGN-plus-P 100-2	PGN-plus-P 100-1-AS	PGN-plus-P 100-2-AS	PGN-plus-P 100-1-IS	PGN-plus-P 100-2-IS
ID		0318544	0318545	0318546	0318547	0318548	0318549
Stroke per jaw	[mm]	10	5	10	5	10	5
Closing/opening force	[N]	870/930	1750/1870	1180/-	2200/-	-/1250	-/2400
Min. spring force	[N]			310	450	320	530
Weight	[kg]	0.9	0.9	1.1	1.1	1.1	1.1
Recommended workpiece weight	[kg]	4.35	8.75	4.35	8.75	4.35	8.75
Fluid consumption double stroke	[cm³]	55	55	84	84	92	92
Min./nom./max. operating pressure	[bar]	2.5/6/8	2.5/6/8	4/6/6.5	4/6/6.5	4/6/6.5	4/6/6.5
Min./max. air purge pressure	[bar]	0.5/1	0.5/1	0.5/1	0.5/1	0.5/1	0.5/1
Closing/opening time	[s]	0.06/0.06	0.06/0.06	0.05/0.09	0.05/0.09	0.09/0.05	0.09/0.05
Closing/opening time with spring	[s]			0.10	0.10	0.10	0.10
Max. permissible finger length	[mm]	160	145	145	130	145	130
Max. permissible mass per finger	[kg]	1.3	1.3	1.3	1.3	1.3	1.3
IP protection class		40	40	40	40	40	40
Min./max. ambient temperature	[°C]	5/90	5/90	5/90	5/90	5/90	5/90
Repeat accuracy	[mm]	0.01	0.01	0.01	0.01	0.01	0.01
Dimensions X x Y x Z	[mm]	120 x 50 x 55	120 x 50 x 55	120 x 50 x 81	120 x 50 x 81	120 x 50 x 81	120 x 50 x 81
<b>Options and their characteristics</b>							
Dustproof version		1317570	1317571	1317572	1317574	1317578	1317581
IP protection class		64	64	64	64	64	64
Weight	[kg]	1.02	1.02	1.22	1.22	1.22	1.22
Corrosion-protected version		38318544	38318545	38318546	38318547	38318548	38318549
High-temperature version		39318544	39318545	39318546	39318547	39318548	39318549
Min./max. ambient temperature	[°C]	5/130	5/130	5/130	5/130	5/130	5/130
Precision version		0318550	0318551	0318552	0318553		

① It may take a few 100 gripping cycles until the full gripping force (as indicated in the data table) will be available.

## Main view

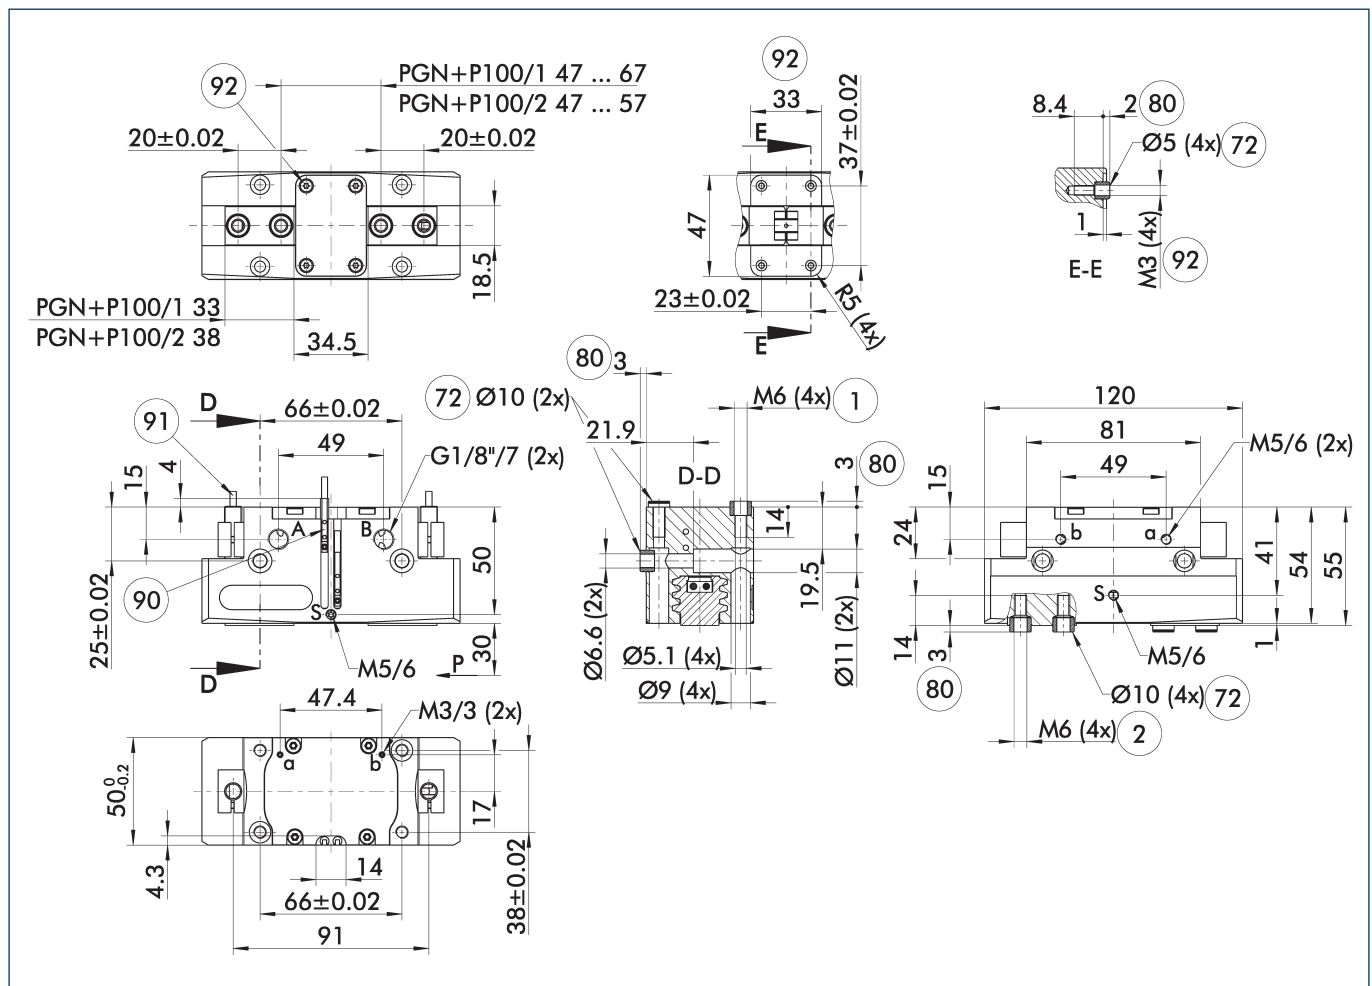

The drawing shows the gripper in the basic version with closed jaws, without dimensional consideration of the options described below.

① The SDV-P pressure maintenance valve can also be used for I.D. or O.D. gripping alternatively or in addition to the spring-loaded, mechanical gripping force maintenance device (see catalog section on accessories).

A, a Main / direct connection, gripper opening

B, b Main / direct connection, gripper closing

S Air purge connection

① Gripper connection

② Finger connection

72 Fit for centering sleeves

80 Depth of the centering sleeve hole in the counter part

90 Sensor MMS 22..



91 Sensor IN ...

92 Screw connection with centering for customized mounting (these centering sleeves are not included in the scope of delivery)

# PGN-plus-P 100

Universal gripper

## Maximum permitted finger projection

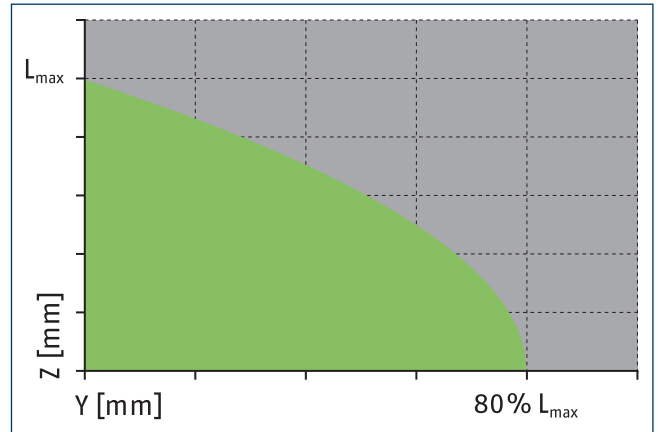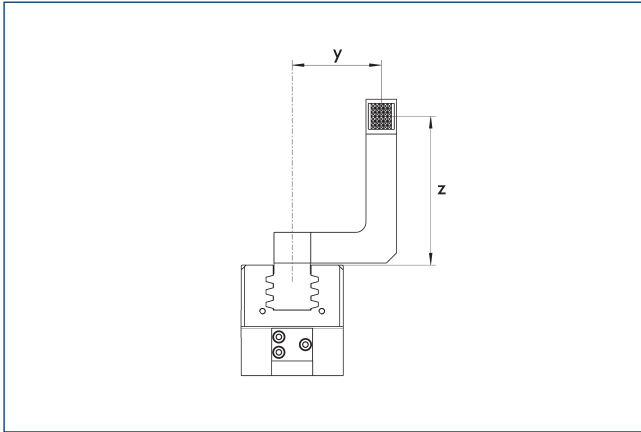


■ Permitted range

■ Inadmissible range

L<sub>max</sub> is equivalent to the maximum permitted finger length, see the technical data table.

## Hose-free direct connection M3

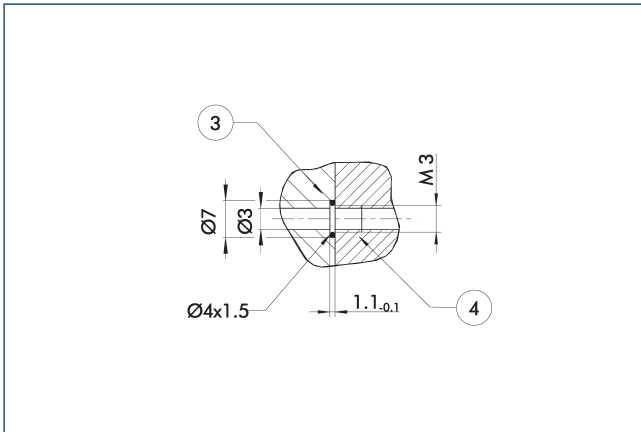


③ Adapter

④ Grippers

The direct connection is used for supplying compressed air without hoses. Instead, the pressure medium is fed through bore-holes in the mounting plate.


## Gripping force maintenance device AS / IS

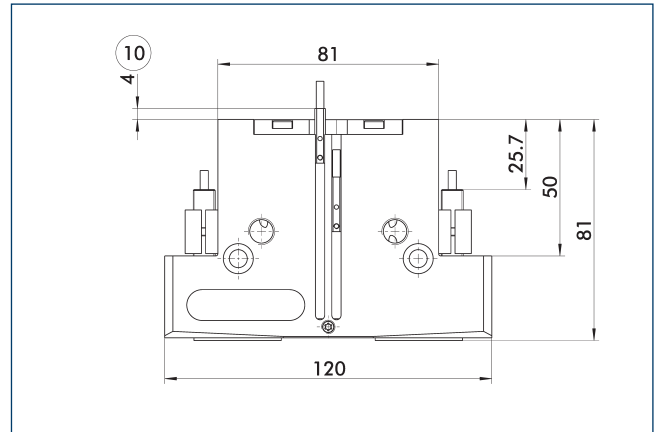

⑩ Projection applies only for AS version

The mechanical gripping force maintenance device ensures that a minimum clamping force will be applied even if there is a drop in pressure. This acts as closing force in the AS / S version, and as opening force in the IS version. Besides this, the gripping force maintenance device can be used to increase the gripping force or for single actuated gripping.

## Precision version

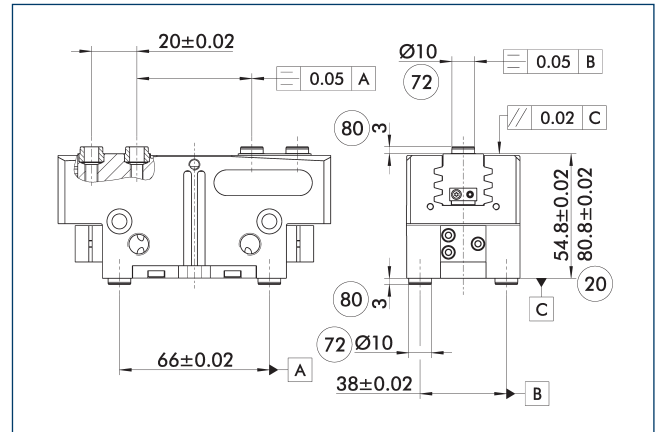


- 20 For AS / IS version  
 72 Fit for centering sleeves  
 80 Depth of the centering sleeve hole in the counter part

The indicated tolerances just refer to the variants of precision versions shown in the chart of technical specifications. All other variants of precision versions are available on request.

① The "dustproof" option can either be ordered as a pre-mounted gripper version or can be retrofitted to the gripper using the "SAD PGN-plus-P" retrofit kit.

SDV-P pressure maintenance valve

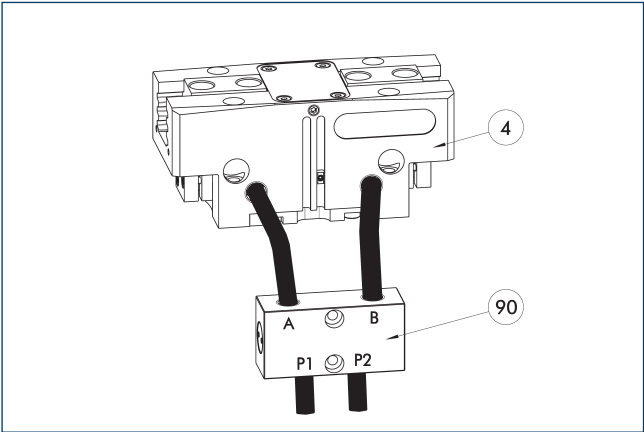


- ④ Grippers
- ⑨⑩ SDV-P pressure maintenance valve

The SDV-P pressure maintenance valve ensures in emergency STOP situations that the pressure in the piston chamber of pneumatic gripper, swivel, linear, and quick-change modules is temporarily maintained.

Characterization	ID	Recommended hose diameter
		[mm]
Pressure maintenance valve		
SDV-P 04	0403130	6
SDV-P 07	0403131	8
Pressure maintenance valve with air bleed screw		
SDV-P 04-E	0300120	6
SDV-P 07-E	0300121	8

❗ In order to achieve the specified closing and opening time for each gripper variant, the recommended hose diameter must be used. The direct allocation of the respective variant of the gripper for the respective SDV-P can be found at [schunk.com](http://schunk.com).

SDV-P E-P pressure maintenance valve

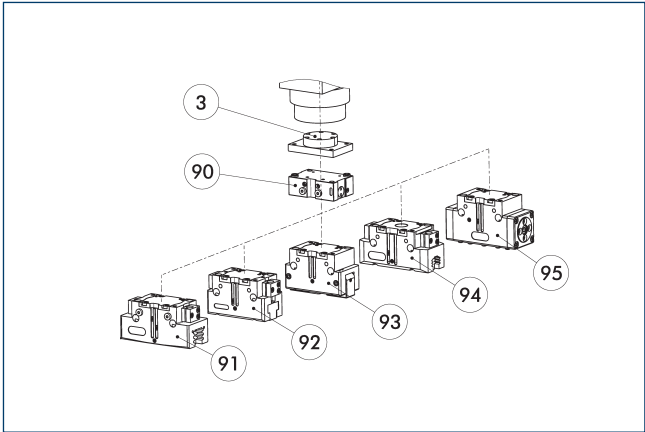


- ③ Adapter
- ⑨⑩ SDV-P E-P pressure maintenance valve
- ⑨① PGN-plus / PGN-plus-P 2-finger parallel gripper
- ⑨② JGP 2-finger parallel grippers
- ⑨③ 2-finger angular gripper PWG-plus
- ⑨④ 2-finger parallel gripper PGB
- ⑨⑤ Sealed DPG-plus gripper

The SDV-P E-P pressure maintenance valves ensure that the pressure in the piston chamber is maintained temporarily during an emergency stop. SDV-P E-P can be directly connected to the listed grippers without the need for additional pneumatic hoses.

Characterization	ID	
Pressure maintenance valve		
SDV-P 100-E-P	0300126	

## Protective cover HUE PGN-plus 100

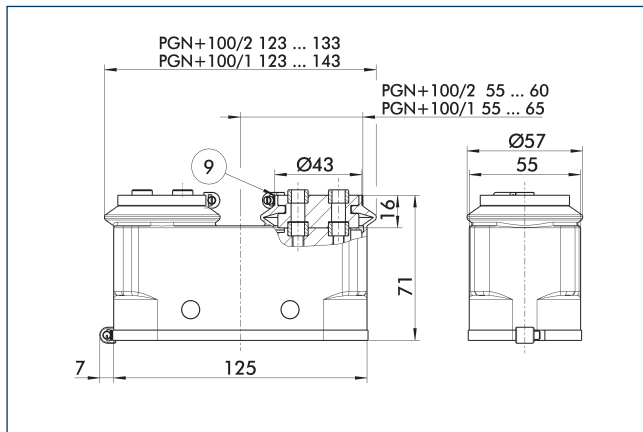


- ⑨ For mounting screw connection diagram, see basic version

The HUE protective cover fully protects the gripper against external influences. The cover is suitable for applications of up to IP65 if an additional sealing of the cover bottom is provided. For detailed information, please see the HUE series. The connection diagram shifts by the height of the intermediate jaw.

Characterization	ID	IP protection class
Protection cover		
HUE PGN-plus 100	0371482	65

- ① The HUE protective cover is not suitable for use on grippers with gripping force maintenance. An inductive monitoring of the gripper in connection with the HUE protective cover is not possible. SCHUNK recommends the use of magnetic sensors that are approved for the respective gripper variant.

## BSWS jaw quick-change jaw systems

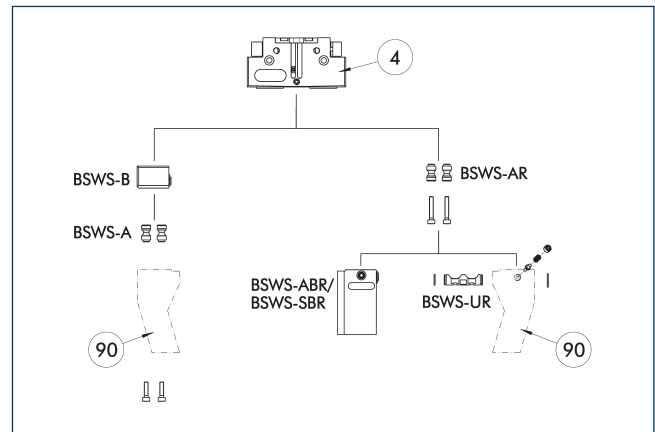

- ④ Grippers      ⑨⑩ Customized gripper fingers

There are various jaw quick-change systems available for the gripper. For detailed information, please refer to the corresponding product.

Characterization	ID	Scope of delivery
Jaw quick-change system adapter plate		
BSWS-A 100	0303026	2
BSWS-AR 100	0300094	2
Quick-change jaw system base		
BSWS-B 100	0303027	1
Jaw quick-change system finger blank		
BSWS-ABR-PGZN-plus 100	0300074	1
BSWS-SBR-PGZN-plus 100	0300084	1
Jaw quick-change system locking mechanism		
BSWS-UR 100	0302993	1

- ① Only systems that are listed in the table, can be used.

## Fields of application

Series	Size	Variant	Suitability
PGN-plus-P	100	-1 (6 bar)	■■■■■
PGN-plus-P	100	-1-AS / -1-IS (6 bar)	■■■■■
PGN-plus-P	100	-2 (6 bar)	■■■■■
PGN-plus-P	100	-2-AS / -2-IS (6 bar)	■■■■■
Legend			
■■■■■			Can be combined without restrictions
■■■□□			Use with restrictions (see loading limits)
□□□□			cannot be combined

The load limits for describing the application limits can be found in the catalog chapter of the corresponding accessories. If the operating pressure is higher than 6 bar, suitability for use above the application limits must be checked.

## Universal gripper

- The optional ZBA-L-plus intermediate jaws allow the screw connection diagram of the top jaws to be rotated by 90°. This makes it easier to design and produce top jaws (particularly for long versions) because no deep through-bores are required.

Characterization	ID	Material	Finger interface	Scope of delivery
Intermediate jaw				
ZBA-L-plus 100	0311742	Aluminum	PGN-plus 100	1

- The drawing shows the UZB universal intermediate jaw. The fully removable UZB-S slide (can also be ordered separately) allows for a quick jaw change.


Characterization	ID	Grid dimension
		[mm]
Universal intermediate jaw		
UZF 100	0300044	2.5
Finger blank		
ABR-PGZN-plus 100	0300012	
SBR-PGZN-plus 100	0300022	
Slide for universal intermediate jaw		
UZF-S 100	5518272	2.5

Series	Size	Variant	Suitability
PGN-plus-P	100	-1 (6 bar)	■■■■
PGN-plus-P	100	-1-AS / -1-IS (6 bar)	■■□□
PGN-plus-P	100	-2 (6 bar)	■■□□
PGN-plus-P	100	-2-AS / -2-IS (6 bar)	□□□□
Legend			
■■■■		Can be combined without restrictions	
■■□□		Use with restrictions (see loading limits)	
□□□□		cannot be combined	

The load limits for describing the application limits can be found in the catalog chapter of the corresponding accessories.

If the operating pressure is higher than 6 bar, suitability for use above the application limits must be checked.

## Finger blanks ABR- / SBR-PGZN-plus 100

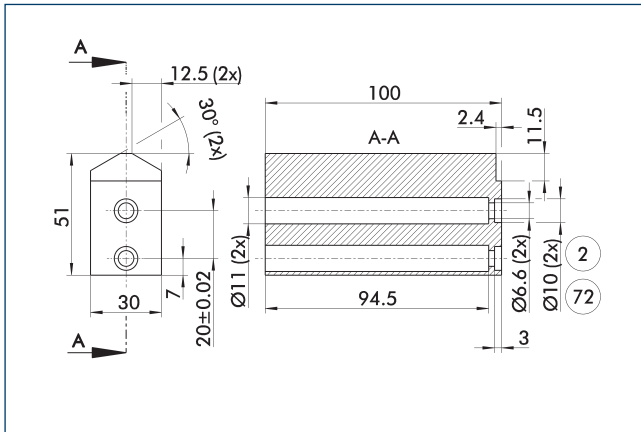


② Finger connection

⑦② Fit for centering sleeves

The drawing shows the finger blank which can be reworked by the customer.

Characterization	ID	Material	Scope of delivery
Finger blank			
ABR-PGZN-plus 100	0300012	Aluminum	1
SBR-PGZN-plus 100	0300022	Steel	1

## Tolerance compensation unit TCU

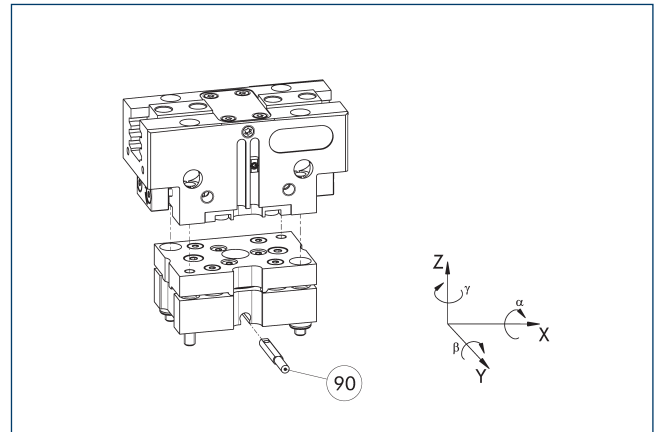


⑨⑩ Monitoring of locking

Grippers can be directly mounted without an adapter plate. Tolerance compensation unit and gripper have an identical screw connection diagram. Therefore the tolerance compensation units can be assembled later. Please consider the additional assembly height of the tolerance compensation unit. For details please refer to our catalog robot accessories.

Characterization	ID	Locking	Deflection	Often combined
Compensation unit				
TCU-P-100-2-MV	0324808	yes	$\pm 1^\circ / \pm 1,5^\circ / \pm 1,2^\circ$	●
TCU-P-100-3-0V	0324811	no	$\pm 1^\circ / \pm 1,5^\circ / \pm 1,2^\circ$	

## Compensation unit AGE-F

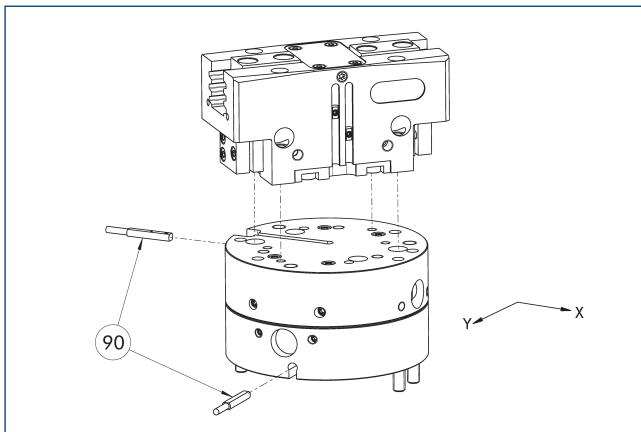


⑨⑩ Monitoring

The unit has direct connection possibilities for different grippers of the PGN-plus, PGN-plus-P and PZN-plus series. For more detailed information, please refer to the main view.

Characterization	ID	Compensation XY	Reset force	Often combined
		[mm]	[N]	
Compensation unit				
AGE-F-XY-080-1	0324960	± 5	39	
AGE-F-XY-080-2	0324961	± 5	85	
AGE-F-XY-080-3	0324962	± 5	90	●

① Due to the interfering contour, monitoring of the gripper is not possible.

## Adapter plate for PGN-plus 100

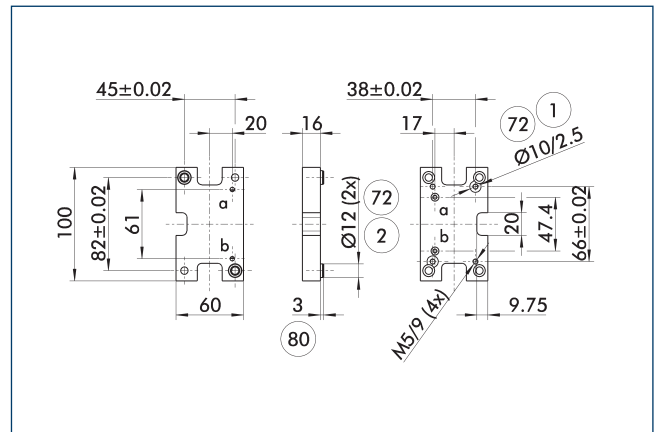

① Robot-side connection

⑦② Fit for centering sleeves


② Tool-side connection

⑧⑩ Depth of the centering sleeve hole in the counter part

The adapter plate has integrated air feed-throughs in order to be able to use the hose-free direct connection of the appropriate gripper.

Characterization	ID
Tool side	
A-CWA-125-100-P	0305829

Compact change system for grippers

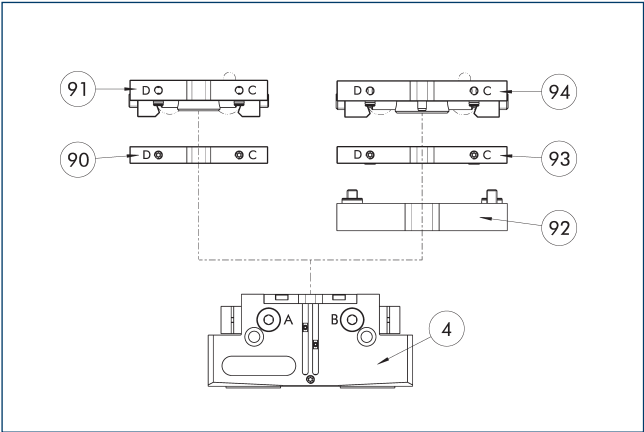

- ④ Grippers

⑨⑩ CWA compact change adapter

⑨① CWK compact change master
- ⑨② A-CWA adapter plate


⑨③ CWA compact change adapter

⑨④ CWK compact change master

Grippers can be directly mounted without an adapter plate. For details see our catalog Gripping or Robot Accessories.

Characterization	ID	
Tool side		
A-CWA-125-100-P	0305829	
CWA compact change adapter		
CWA-100-P	0305801	
CWK compact change master		
CWK-100-P	0305800	

Attachment valves

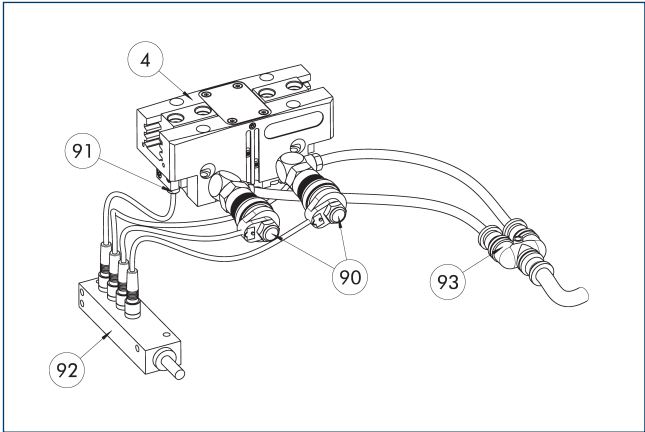

- ④ Grippers

⑨⑩ Micro valves

⑨① Sensor
- ⑨② Sensor distributor


⑨③ Y distributor

The set of attachment valves reduces the compressed air consumption as there is no need to ventilate or bleed the supply lines. This can also reduce cycle time. The hose-free direct assembly of the micro valves reduces the hosing effort for the gripper. To further simplify electrical connection of the valves and sensors, their signals can be bundled via an optional distributor.

Characterization	ID	Often combined
Attachment valve		
ABV-MV30-G1/8	0303328	
ABV-MV30-G1/8-V2-M8	0303396	
ABV-MV30-G1/8-V4-M8	0303366	●
ABV-MV30-G1/8-V8-M8	0303367	

- ① A set of attachment valves ABV is required per actuator. The ABV set contains two 3/2 micro valves, an Y-distributor for compressed air supply and optionally a sensor distributor with two, four or eight inputs or outputs. Sensors for monitoring the gripper need to be ordered separately. Pneumatic hoses are not included in the scope of delivery.

Modular Assembly Automation

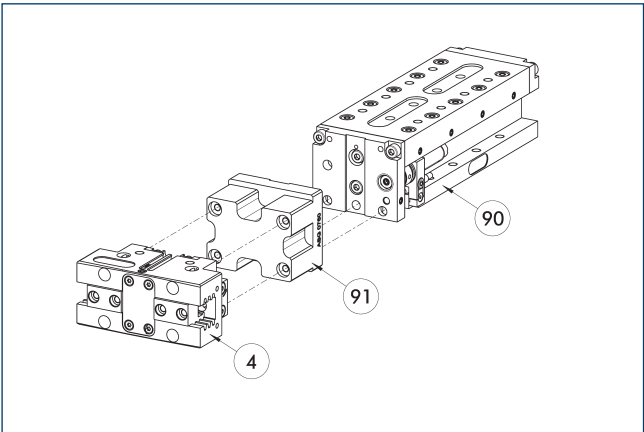


- ④ Grippers

⑨⑩ CLM/KLM/LM/ELP/ELM/ELS/HLM linear modules
- ⑨① ASG adapter plate

Grippers and linear modules can be combined with standard adapter plates from the modular assembly system. For more information see our main catalog "Modular Assembly Automation".

### VB-PGN-plus 100 valve box

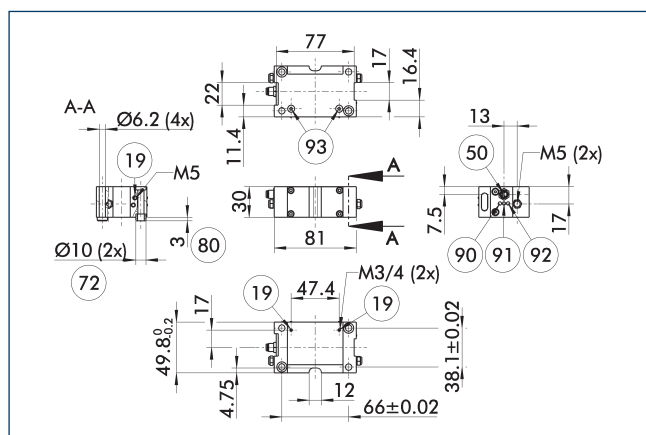


- |   |   |
|---|---|
| ①9 Air connection   | ⑨0 Voltage status indicator                 |
| ⑤0 Electrical connection                                  | ⑨1 Status display valve connection b opened |
| ⑦2 Fit for centering sleeves                              | ⑨2 Status display valve connection a opened |
| ⑧0 Depth of the centering sleeve hole in the counter part | ⑨3 Valve connection a and b                 |

Characterization	ID	
Valve box		
VB-PGN-plus 100	0310094	

# PGN-plus-P 100

Universal gripper

## Valve box

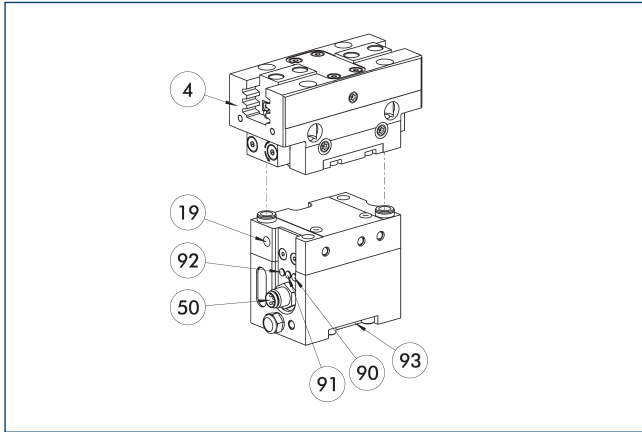


- ④ Grippers
- ①⑨ Air connection
- ⑤⑩ Electrical connection
- ⑨⑩ Power supply
- ⑨① Status display valve connection b opened
- ⑨② Status display valve connection a opened
- ⑨③ Direct connection for hose-free compressed air supply

Decentralized control solution completely ready for use! The valves are directly mounted on the handling component. This allows a strong reduction of cycle times, commissioning times, air consumption, and less tubing. All of these combined lead to maximum process reliability with minimum effort.

Characterization	ID	Often combined
<b>Valve box</b>		
VB-PGN-plus 100	0310094	
<b>Connection cables</b>		
KA BG08-L 4P-0500	0307767	●
KA BG08-L 4P-1000	0307768	
KA BW08-L 4P-0500	0307765	
KA BW08-L 4P-1000	0307766	
<b>Sensor distributor</b>		
V2-M8-4P-2XM8-3P	0301380	
<b>clip for plug/socket</b>		
CLI-M8	0301463	

- ① Valve and sensor signals of the unit can be merged on a bus distributor so that the electrical as well as the pneumatic connections can be decentralized.

## Inductive Proximity Switches

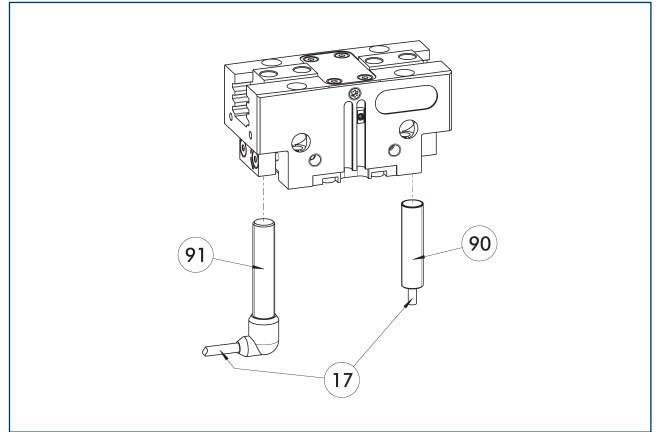


- ①⑦ Cable outlet
- ⑨⑩ Sensor IN ...
- ⑨① Sensor IN...-SA

Directly mounted end position monitoring.

Characterization	ID	Often combined
<b>Inductive proximity switches</b>		
IN 80-S-M12	0301578	
IN 80-S-M8	0301478	●
INK 80-S	0301550	
<b>Inductive proximity switch with lateral cable outlet</b>		
IN 80-S-M12-SA	0301587	
IN 80-S-M8-SA	0301483	●
INK 80-S-SA	0301566	
<b>Cable extension</b>		
KV BG12-SG12 3P-0030-PNP	0301999	
KV BG12-SG12 3P-0060-PNP	0301998	
KV BW08-SG08 3P-0030-PNP	0301495	
KV BW08-SG08 3P-0100-PNP	0301496	
KV BW08-SG08 3P-0200-PNP	0301497	●
KV BW12-SG12 3P-0030-PNP	0301595	
KV BW12-SG12 3P-0100-PNP	0301596	
KV BW12-SG12 3P-0200-PNP	0301597	
<b>clip for plug/socket</b>		
CLI-M12	0301464	
CLI-M8	0301463	
<b>Connection cables</b>		
KA BG08-L 3P-0300-PNP	0301622	●
KA BG08-L 3P-0500-PNP	0301623	
KA BG12-L 3P-0500-PNP	30016369	
KA BW08-L 3P-0300-PNP	0301594	
KA BW08-L 3P-0500-PNP	0301502	
KA BW12-L 3P-0300-PNP	0301503	
KA BW12-L 3P-0500-PNP	0301507	
<b>Sensor distributor</b>		
V2-M12	0301776	●
V2-M8	0301775	●
V4-M12	0301747	
V4-M8	0301746	
V8-M12	0301752	
V8-M8	0301751	

- ① Two sensors are required per unit for monitoring two positions. On option, extension cables and sensor distributors are available. Additional product variants of the sensor, and further information and technical data can be found in the catalog chapter sensor system.

### Flexible position sensor

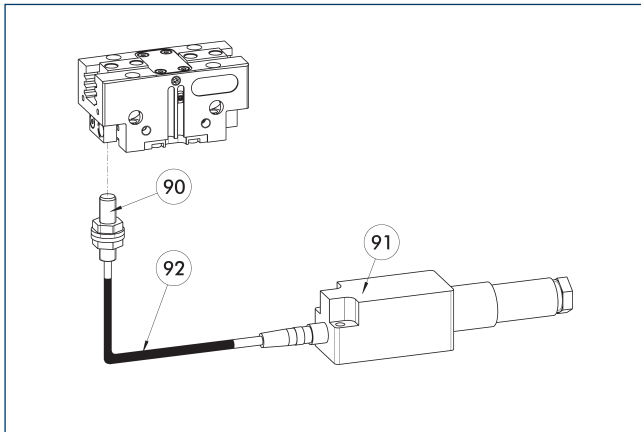


- 90 FPS-S sensor  
 91 FPS-F5 evaluation electronic  
 92 Cable extension

Flexible position monitoring of up to five positions.

Characterization	ID	
Attachment kit for FPS		
AS-FPS-PGN-plus-P 100	1363897	
Sensor		
FPS-S M8	0301704	
Cable extension		
KV BG08-SG08 3P-0050	0301598	
KV BG08-SG08 3P-0100	0301599	
Evaluation electronics		
FPS-F5	0301805	

- ⓘ When using an FPS system, an FPS sensor (FPS-S) as well as an electronic processor (FPS-F5 / F5 T) are required for each gripper as well as a mounting kit (AS), if listed. Cable extensions (KV) are optionally available – see catalog chapter “Accessories.”

### Electronic magnetic switch MMS

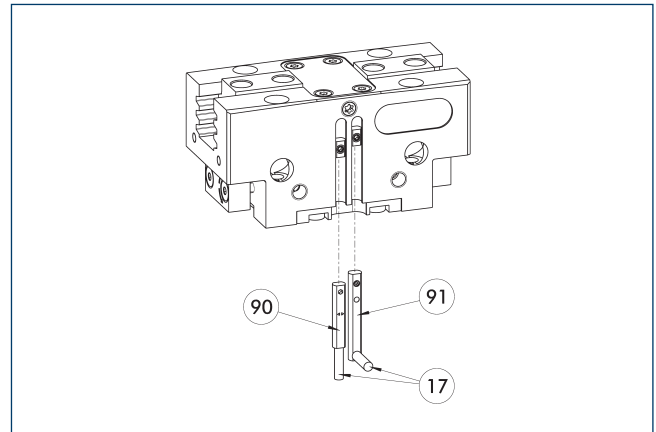


- 17 Cable outlet  
 90 Sensor MMS 22 PI1-...  
 91 Sensor MMS 22 ...-PI1-...-SA

End position monitoring for mounting in the C-slot.

Characterization	ID	Often combined
Electronic magnetic switch		
MMS 22-S-M8-PNP	0301032	●
MMSK 22-S-PNP	0301034	
Electronic magnetic switches with lateral cable outlet		
MMS 22-S-M8-PNP-SA	0301042	●
MMSK 22-S-PNP-SA	0301044	
Cable extension		
KV BW08-SG08 3P-0030-PNP	0301495	
KV BW08-SG08 3P-0100-PNP	0301496	
KV BW08-SG08 3P-0200-PNP	0301497	●
clip for plug/socket		
CLI-M8	0301463	
Connection cables		
KA BG08-L 3P-0300-PNP	0301622	●
KA BG08-L 3P-0500-PNP	0301623	
KA BW08-L 3P-0300-PNP	0301594	
KA BW08-L 3P-0500-PNP	0301502	
Sensor distributor		
V2-M8	0301775	●
V4-M8	0301746	
V8-M8	0301751	

- ⓘ Two sensors are required per unit for monitoring two positions. On option, extension cables and sensor distributors are available. Additional product variants of the sensor, and further information and technical data can be found in the catalog chapter sensor system.

Programmable magnetic switch MMS 22-PI1

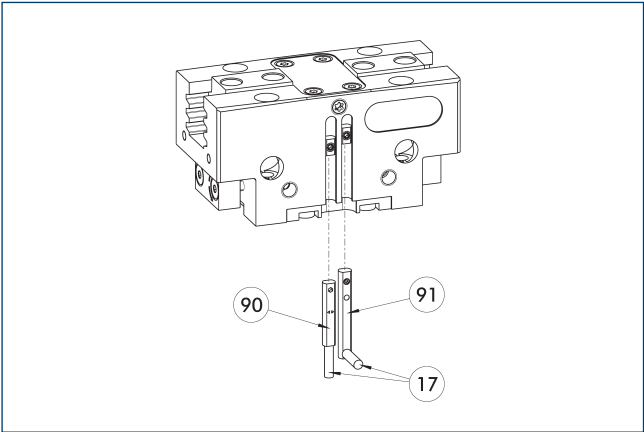


- 17 Cable outlet
- 91 Sensor MMS 22 ..-PI1-...-SA
- 90 Sensor MMS 22 PI1-...

Position monitoring with one programmable position per sensor and integrated electronic system in the sensor. Can be programmed using MT magnetic teaching tool (included in the scope of delivery) or ST plug teaching tool (optional). End position monitoring for mounting in the C-slot. If the ST plug teaching tools are listed in the table provided, teaching is only possible with the ST teaching tools.

Characterization	ID	Often combined
Programmable magnetic switch		
MMS 22-PI1-S-M8-PNP	0301160	●
MMSK 22-PI1-S-PNP	0301162	
Programmable magnetic switch with lateral cable outlet		
MMS 22-PI1-S-M8-PNP-SA	0301166	●
MMSK 22-PI1-S-PNP-SA	0301168	
Programmable magnetic switch with stainless steel housing		
MMS 22-PI1-S-M8-PNP-HD	0301110	●
MMSK 22-PI1-S-PNP-HD	0301112	

- ① Two sensors are required per unit for monitoring two positions. On option, extension cables and sensor distributors are available. Additional product variants of the sensor, and further information and technical data can be found in the catalog chapter sensor system.

Programmable magnetic switch MMS 22-PI2

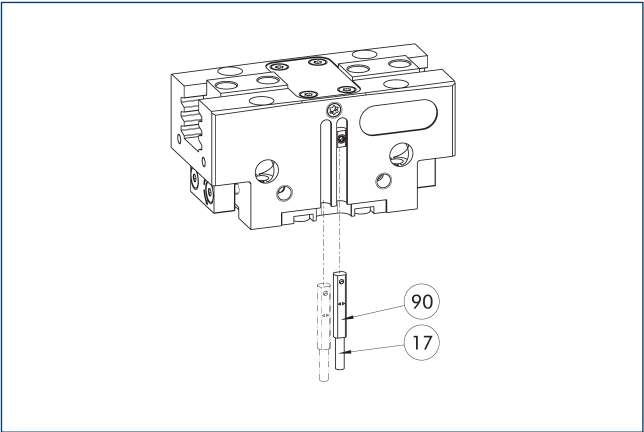


- 17 Cable outlet
- 90 MMS 22...-PI2-... sensor

Position monitoring with two programmable positions per sensor and electronics built into the sensor. Can be programmed using MT magnetic teaching tool (included in the scope of delivery) or ST plug teaching tool (optional). End position monitoring for mounting in the C-slot. If the ST plug teaching tools are listed in the table provided, teaching is only possible with the ST teaching tools.

Characterization	ID	Often combined
Programmable magnetic switch		
MMS 22-PI2-S-M8-PNP	0301180	●
MMSK 22-PI2-S-PNP	0301182	
Programmable magnetic switch with lateral cable outlet		
MMS 22-PI2-S-M8-PNP-SA	0301186	●
MMSK 22-PI2-S-PNP-SA	0301188	
Programmable magnetic switch with stainless steel housing		
MMS 22-PI2-S-M8-PNP-HD	0301130	●
MMSK 22-PI2-S-PNP-HD	0301132	

- ① One sensor is required per unit for monitoring two positions. Extension cables and sensor distributors are optionally available. Additional product variants of the sensor, and further information and technical data can be found in the catalog chapter sensor systems.

MMS-P programmable magnetic switch

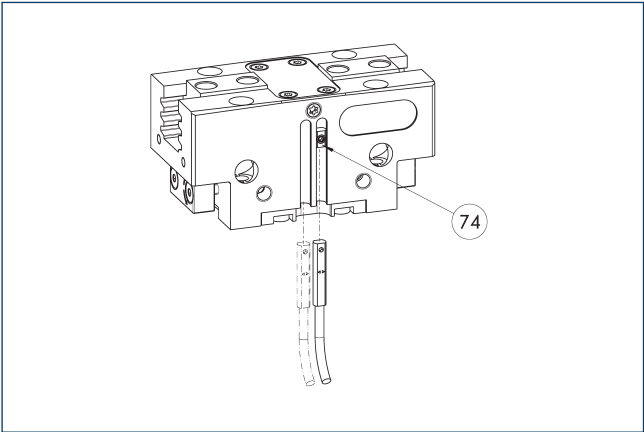


74 Limit stop for sensor

Position monitoring with two programmable positions per sensor. End position monitoring for mounting in the C-slot.

Characterization	ID	Often combined
Programmable magnetic switch		
MMSK-P 22-S-PNP	0301371	
MMS-P 22-S-M8-PNP	0301370	●
clip for plug/socket		
CLI-M8	0301463	
Connection cables		
KA BG08-L 4P-0500	0307767	●
KA BG08-L 4P-1000	0307768	
KA BW08-L 4P-0500	0307765	
KA BW08-L 4P-1000	0307766	
Sensor distributor		
V2-M8-4P-2XM8-3P	0301380	

- ① One sensor is required per unit for monitoring two positions. Extension cables and sensor distributors are optionally available. Additional product variants of the sensor, and further information and technical data can be found in the catalog chapter sensor systems.

MMS-A analog position sensor

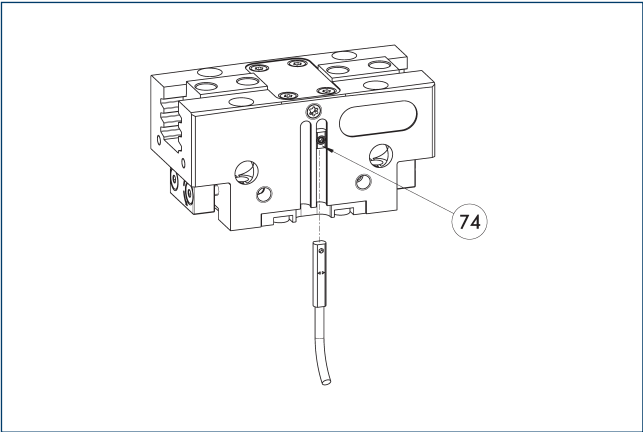

74 Limit stop for sensor

No-contact measuring, analog multi-position monitoring for any number of positions.


Characterization	ID	
Analog position sensor		
MMS 22-A-10V-M08	0315825	
MMS 22-A-10V-M12	0315828	

- ① One sensor is required for each gripper. No additional mounting kit is required – the gripper is equipped for use of the sensor by default. Further information and technical data can be found in the catalog chapter sensor systems.

# PGN-plus-P 100

Universal gripper

## Flexible position sensor with MMS-A

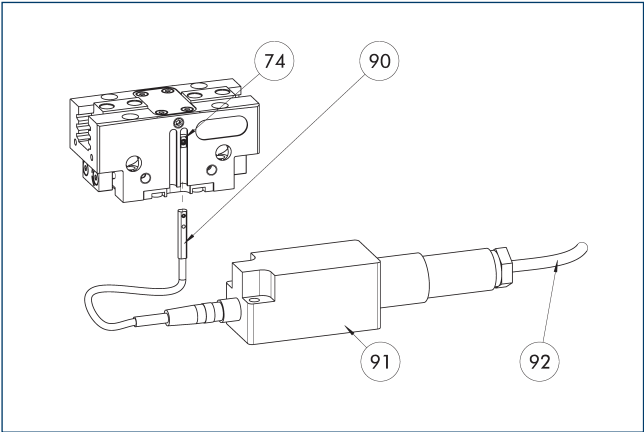


- 74 Limit stop for sensor
- 90 MMS 22-A-... sensor
- 91 FPS-F5 evaluation electronic
- 92 Connection cables

Flexible position monitoring of up to five positions.

Characterization	ID	
Analog position sensor		
MMS 22-A-05V-M08	0315805	
Evaluation electronics		
FPS-F5	0301805	
Connection cables		
KA BG16-L 12P-1000	0301801	

- ① When using an FPS system, one MMS 22-A-05V and one electronic processor (FPS-F5) are required per each gripper, as well as a mounting kit (AS), if listed. Cable extensions (KV) are optionally available – see catalog chapter “Accessories.”

## Programmable magnetic switch MMS-IO-Link

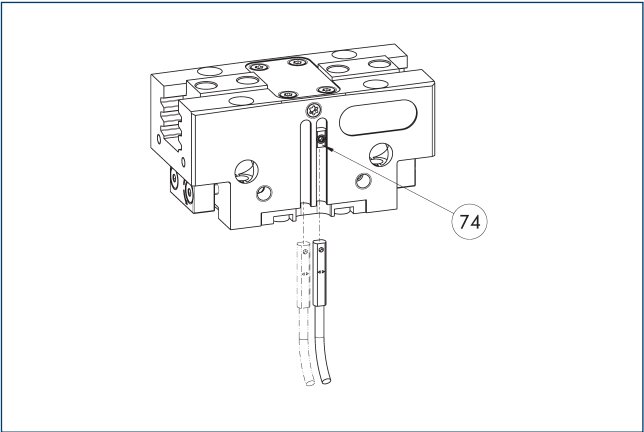


- 74 Limit stop for sensor

Sensor for multi-position monitoring through detection of the complete gripper stroke. The sensor is mounted directly in the C-slot of the gripper. Sensor programming on the gripper takes place via the IO-Link interface or the MT magnetic teach tool (included in scope of delivery). An IO-Link master is required for operation.

Characterization	ID	
Programmable magnetic switch		
MMS 22-IO-L-M08	0315830	
MMS 22-IO-L-M12	0315835	

- ① One sensor is required for each gripper. No additional mounting kit is required – the gripper is equipped for use of the sensor by default. Further information and technical data can be found in the catalog chapter sensor systems.

## APS-Z80 analog position sensor

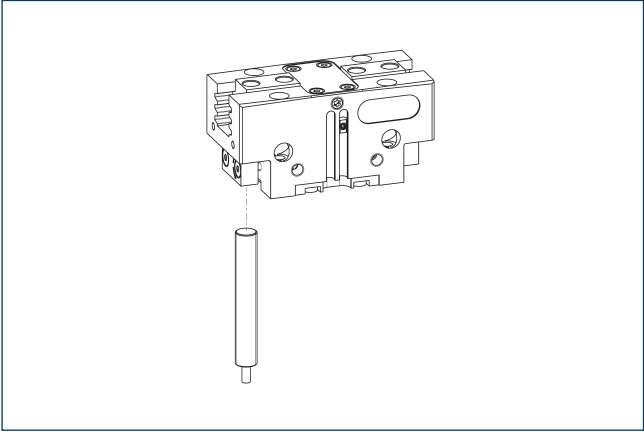


No-contact measuring, analog multi-position monitoring for any number of positions.

Characterization	ID	Often combined
Mounting kit for APS-Z80		
AS-APS-Z80-PGN-plus-P 100-1	1366219	
AS-APS-Z80-PGN-plus-P 100-2	1366224	
Analog position sensor		
APS-Z80-K	0302072	
APS-Z80-M8	0302070	●

- ① When using an APS system, one mounting kit (AS-APS-Z80) and one APS-Z80 sensor is required per gripper. The resolution of the sensor can be lower in the peripheral areas of the gripper. You can find further information on the product in the operating manual.

APS-M1 analog position sensor

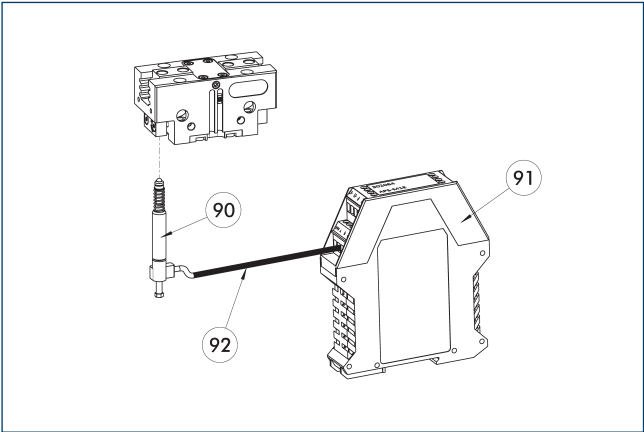

- 90 APS-M1S sensor
- 91 APS-M1E electronic processor
- 92 APS-K extension cable

Analog multi position monitoring for any desired positions

Characterization	ID	
Mounting kit for APS-M1		
AS-APS-M1-PGN-plus-P 100-1	1363733	
AS-APS-M1-PGN-plus-P 100-2	1363737	
Analog position sensor		
APS-M1S	0302062	

- ① When using an APS system, for each gripper an attachment kit (AS-APS-M1), an APS-M1S sensor (incl. 3 m cable) as well as an electronics (APS-M1e) are required. An extension cable (APS-K) can be connected between the sensor and the electronics as an option. The max. cable length between the sensor and the electronics is 10 m, between the electronics and their control unit (PLC) it is max. 1 m.

**SCHUNK GmbH & Co. KG**  
**Spann- und Greiftechnik**

Bahnhofstr. 106 - 134  
D-74348 Lauffen/Neckar  
Tel. +49-7133-103-0  
Fax +49-7133-103-2399  
info@de.schunk.com  
schunk.com



Jens Lehmann, German goalkeeper legend, SCHUNK brand ambassador since 2012 for  
safe, precise gripping and holding.  
[schunk.com/Lehmann](https://schunk.com/Lehmann)