


FD400

TO USE WITH 400ML CARTRIDGES (DIN1284)

DATA SHEET

# WHAT'S IN THE BOX

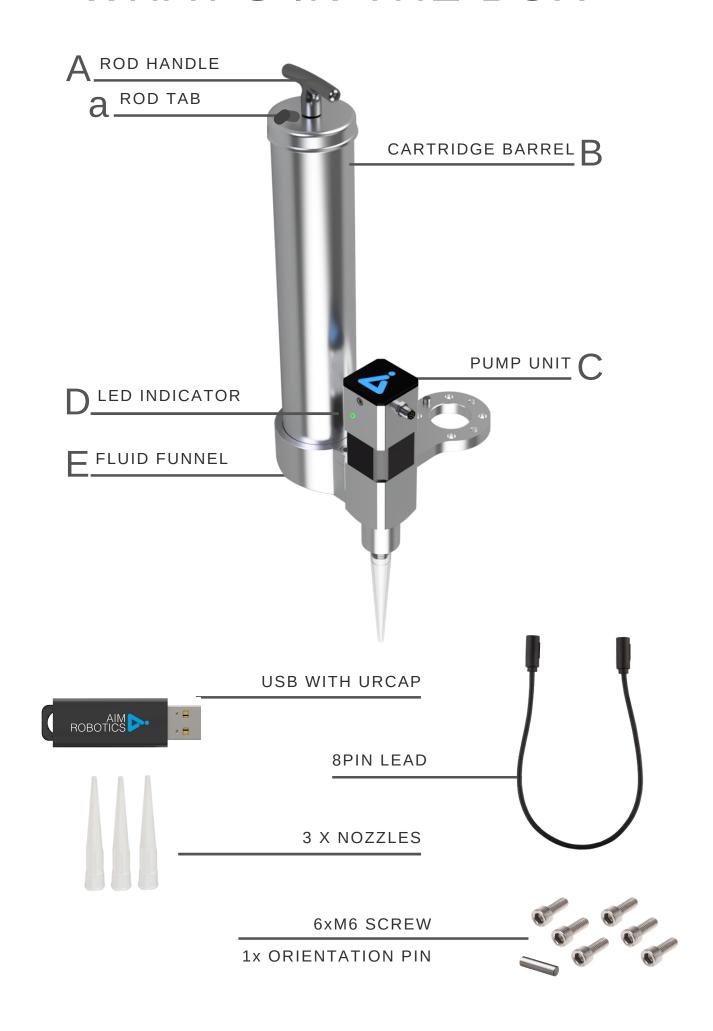

## TECHNICAL DATA

#### FD400 FEATURES

- Only connect to cobot, no need for external air supply
- Use with 400ml cartridges DIN 1284
- Recommended for single-component medium viscosity fluids, NLGI class 2-3 (approximate 150.000-2.000.000cps)

Model # FD400

URCap version ≥3.2

Mechanical interface: ISO 9409-1, type 50-4-M6

Electrical interface: 8-pole M8


Digital interfaces: URCap, PolyScope ≥5.5

URCap, API ≥1.8

RS485 24V I/O

Weight (without cartridge): 1.7kg

Dimensions: 135 x 145 x 390mm

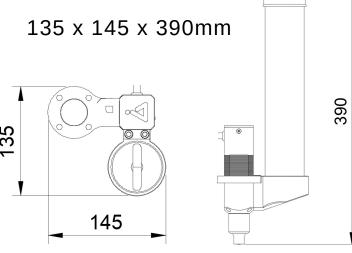

#### No air

Accurate dispensing

## **Easy installation and Setup**

- Up and running in 10 minutes
- Specially designed software

### **Fully integrated with Universal Robots**

 Single connection utilizing the M8 8pin connector

## AIM ROBOTICS APS

**DENMARK** 

+45 31 51 55 11



AIM-ROBOTICS.COM



SALES@AIM-ROBOTICS.COM







