


AIM
ROBOTICS  TM
DISPENSING MADE SIMPLE


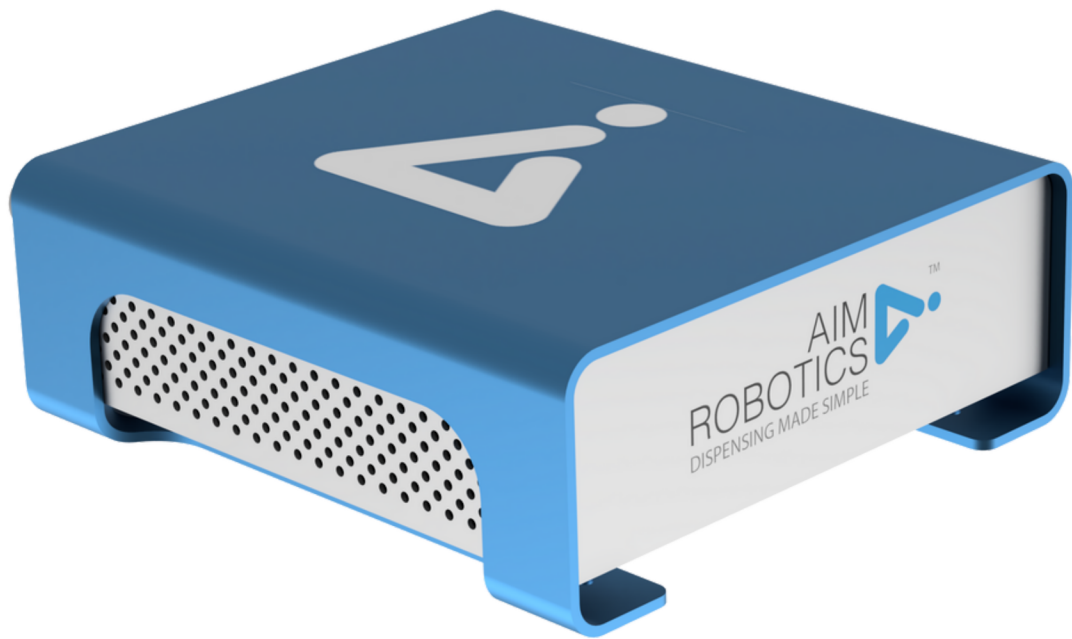


AIRBOX DISPENSING CONTROLLER

Electronically controlled / Single M12-8pin cable / Plug&Dispense

AirBox


- Full control via robot
- Over & Under Pressure Monitor
- Intuitive URCap

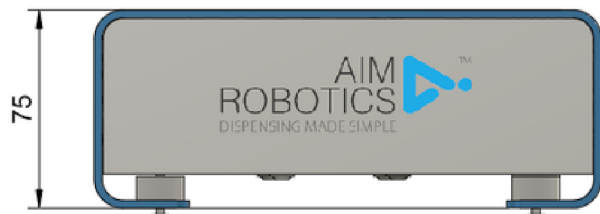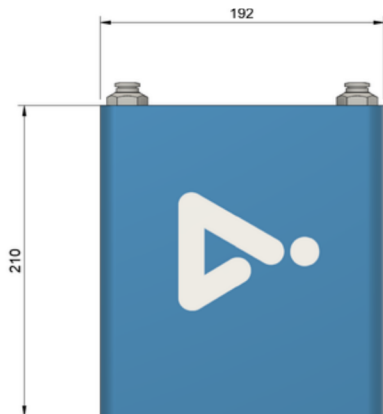

Connection Diagram

1	White	Set Pressure I/O
2	Brown	+24VDC
3	Green	Vacuum Switch I/O
4	Yellow	Inlet Pressure Sensor
5	Grey	Outlet Pressure Sensor
6	Pink	N/C
7	Blue	GND
8	Red	N/C

M12 8-pin pinout



Technical Data at 24V DC and 20 °C

Dimensions	220 x 75 x 192 mm 8,65 x 2,95 x 7,55 inch
Supply Voltage	24 V DC $\pm 10\%$ Ripple P-P 10% or less
Current Consumption	Up to 1A
Air Input	$\varnothing 10$ mm, clean, dry air max 8 bar 120 psi
Air Output	$\varnothing 10$ mm, 0.1-7.0 bar 1.5-100 psi
Short Circuit Protection	Incorporated
Response time	100 ms or less
Pressure Set Linearity	$\pm 1\%$ F.S. or less
Hysteresis	0.5% F.S or less
Operating temperature	-10 to +55 °C 14 to +131 °F (No dew condensation or icing)
IP Class	IP65 (IEC)
Housing Material	Aluminum 6061
Weight	1800g 4.0lbs

☎ +45 31 51 55 11

🌐 aim-robotics.com

@ sales@aim-robotics.com

